



LN10011

4W DUAL DC/DC CONVERTER

$5V_{IN} \pm 40V_{OUT}$


Key Features

- 2:1 input voltage range
- 65% efficiency
- Six-sided shielding
- Soft start
- Dual output
- Short circuit protection
- Adjustable output
- 750 μ A off state current
- Industry pinouts



Functional Description

The LN10011 is a dual output, isolated DC/DC converter that accepts $4.5V_{IN}$ to $9V_{IN}$ and provides $\pm 40V_{OUT}$ @50mA.

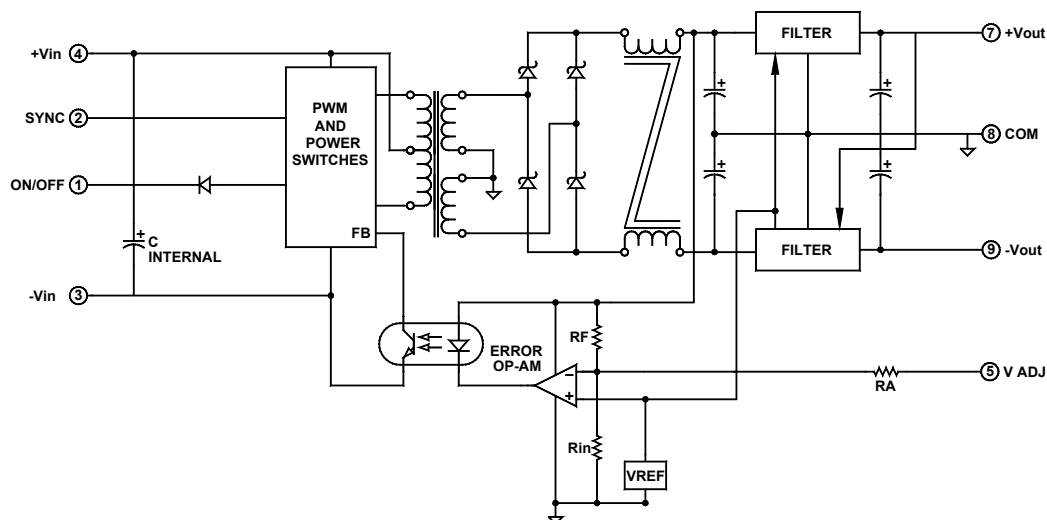

Typical Block Diagram

Electrical Specifications

INPUT SPECIFICATIONS

Unless otherwise specified, all parameters are given under typical +25°C with nominal input voltage and under full output load conditions.

PARAMETER	CONDITION / NOTE	MIN	TYP	MAX	UNIT
Input Voltage Range		4.5	5	9	Vdc
No Load Input Current			30		mA
Full Load Input Current	V = 28V@FL (±250mA)		1220		mA
Input Filter	C				
Reverse Polarity Input Current	External series-blocking diode			12	A
Input Surge Current (20µS Spike)				10	A
Short Circuit Current Limit			150		% I _{IN}
Undervoltage Shutdown		4.5			Vdc
Off State Current			750		µA
Remote ON/OFF Control					
Converter ON	Open (Open circuit voltage at Pin 1: 10V Max.)				
Converter OFF		-0.6	0	0.2	Vdc
Logic Input Reference	-Input				
Logic Compatibility	TTL Open Collector or CMOS Open Drain				

OUTPUT SPECIFICATIONS

PARAMETER	CONDITION / NOTE	MIN	TYP	MAX	UNIT
Output Voltage			±40		Vdc
Output Voltage Accuracy			±1	±1.5	%
Output Voltage Adjustment			3	±5	%
Voltage Balance, Dual ¹			±2	±5	%
Output Current	FL		±50		mA
Minimum Load ¹		10			% of FL
Ripple & Noise			±1	±2	% of V _{OUT}
Line Regulation	Minimum V _{IN} to maximum V _{IN}		±1	±2	%
Load Regulation ²			±1	±2	%
Temperature Coefficient @ FL			0.02		%/°C of V _{OUT}
Transient Response Time (to within 0.5% of V _{OUT})	50% FL to FL to 50% FL, See Figure 1		5		µS
Short Circuit Protection	All outputs, by input current limiting				

¹ In applications where the -V_{OUT} is loaded more than +V_{OUT}, a minimum load is required between +V_{OUT} and GND. If the load is connected between +V_{OUT} and -V_{OUT}, no minimum load is required.

² For dual converters if only the -V_{OUT} is loaded. A 10% FL must be connected from +V_{OUT} to Ground.

GENERAL SPECIFICATIONS

PARAMETER	CONDITION / NOTE	MIN	TYP	MAX	UNIT
Efficiency	V = 28V, I = ±250mA		65		%
Isolation Voltage (1 min.)			1500		Vdc
Isolation Resistance			10 ⁹		Ω
Isolation Capacitance			80		pF
Switching Frequency		300	320	333	kHz

ENVIRONMENTAL SPECIFICATIONS

PARAMETER	CONDITION / NOTE	MIN	TYP	MAX	UNIT
Operating Temperature, Extended (X)		-40		+71	°C
Storage Temperature Range		-55		+125	°C
Thermal Resistance			3.5	4	°C/W _{DISS}
Maximum Operating Case Temperature				105	°C
Humidity	Up to 95% non-condensing				
Cooling	Free-air convection				
EMI/RFI	Six-sided continuous shielded metal case				
MTBF	per MIL-HNBK-217F (Ground benign, +25°C)		1×10 ⁶		hours

PHYSICAL CHARACTERISTICS

PARAMETER	CONDITION / NOTE	MIN	TYP	MAX	UNIT
Dimensions (L×W×H)	2.00×1.00×0.395 in. (50.80×25.40×10.03mm)				
Weight	1.04 oz. (30g)				
Case Material	Coated metal				
Shielding Connection	-Input (Pin 3)				

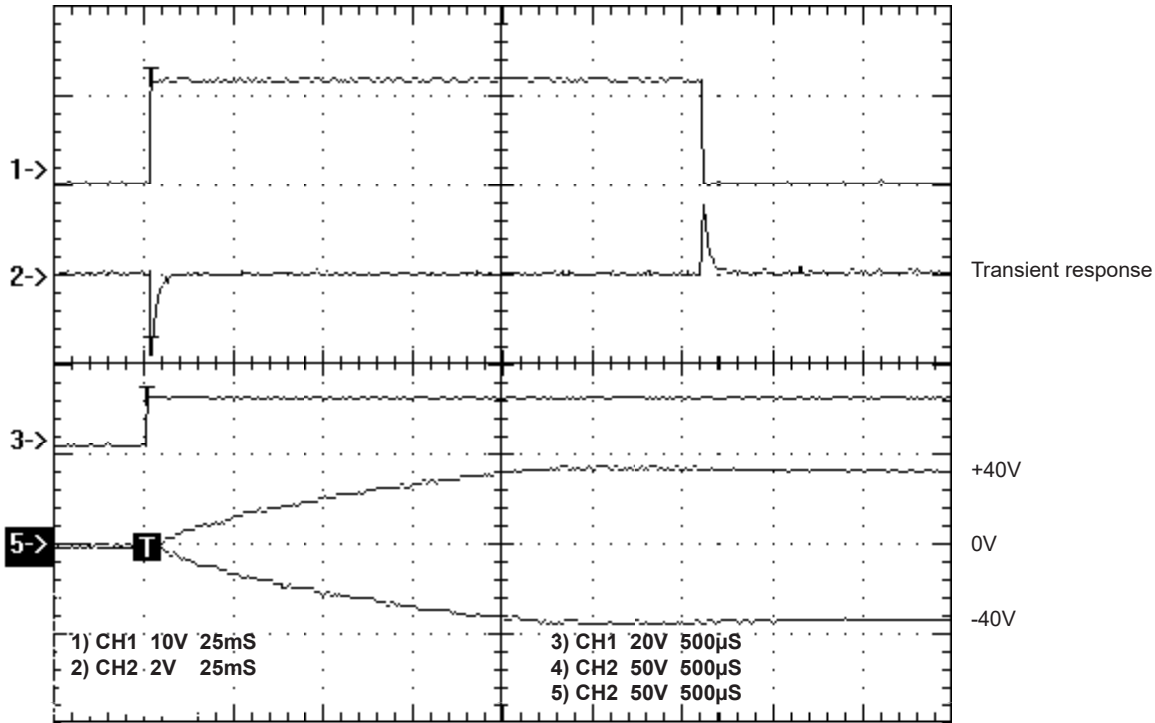


FIGURE 1. Transient response and turn on delay with soft start


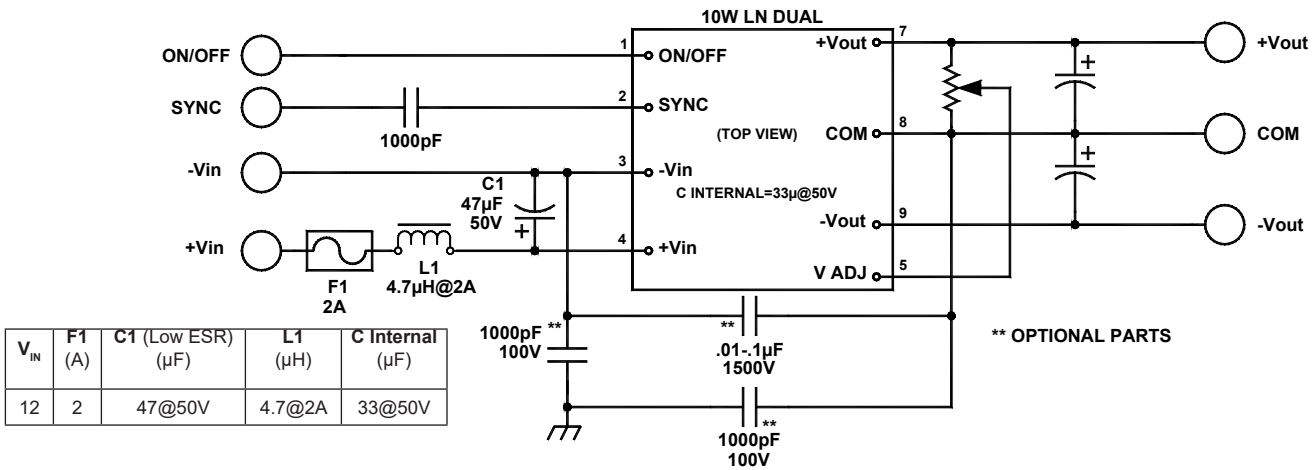


FIGURE 2. Typical connection diagram of Low-Noise 10W Dual DC/DC Converter

MECHANICAL SPECIFICATIONS

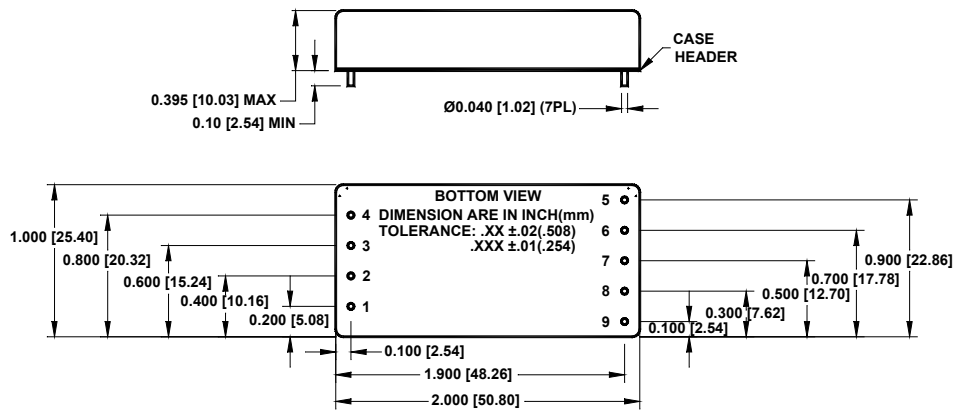

Pin	Function
	DUAL
1	ON/OFF
2	SYNC
3	$-V_{IN}$
4	$+V_{IN}$
5	V_{OUT} ADJ
6	No Pin
7	$+V_{OUT}$
8	COM
9	$-V_{OUT}$

OUTPUT VOLTAGE ADJUSTMENT

For both single and dual models, the output reference voltage is referenced to the output ground: Pin 6 for singles and Pin 8 for duals. To trim the output voltage high, connect a 1% resistor ($0k\Omega$ – $200k\Omega$ range) between $-V_{OUT}$ (Pin 6) and V_{OUT} Adjust (Pin 9) for the singles, and COM (Pin 8) and V_{OUT} Adjust (Pin 5) for the duals. To trim the output voltage low, connect a 1% resistor ($50k\Omega$ – $500k\Omega$ range) between $+V_{OUT}$ (Pin 5) and V_{OUT} Adjust (Pin 9) for the singles,

and $+V_{OUT}$ (Pin 7) and V_{OUT} Adjust (Pin 5) for the duals.

With the wiper connected to the V_{OUT} Adjust pin, a variable resistor (potentiometer) can also be used for V_{OUT} adjustment by connecting each end to $+V_{OUT}$ and $-V_{OUT}$ for the singles, and $+V_{OUT}$ and COM for the duals. A potentiometer between $50k\Omega$ – $100k\Omega$ can be used. Avoid using a low resistance potentiometer or a high temperature coefficient such as wound wire.

EXTERNAL SYNCHRONIZATION

This series of converters can be synchronized to an external system clock of 320kHz -2% to 10%. The external clock is AC-coupled to the input SYNC terminal (Pin 2) through a coupling capacitor

from 220pF to 1000pF. The required amplitude is 3.3V to 5V and its duty cycle is 50% $\pm$ 20%. Please refer to *Application Note DC-005: Synchronization* for more information.